

AC Induction Motor Spur Gearbox Type ST60-2IK6



Motor Data

Model	Rated Power (W)	Rated Voltage (V)	Frequency (Hz)	Rated Current (A)	Starting Torque (mNm)	Rated Torque (mNm)	Rated Speed (min ⁻¹)	Capacitor (μF)
2IK6-A	6	1ph 100	50 60	0.24 0.25	55 50	48 40	1200 1450	3.5
2IK6-E	6	1ph 110 1ph 120	60	0.16 0.18	40	40	1450	2.0
2IK6-C	6	1ph 220 1ph 230	50	0.12 0.14	50	48	1200	0.8
2IK6-H	6	1ph 220 1ph 230	60	0.12 0.14	55	40	1450	0.8
2IK6-S	6	3ph 220	50 60	0.076 0.065	85 70	48 40	1200 1450	–
2IK6-S3	6	3ph 380	50 60	0.044 0.038	85 70	48 40	1200 1450	–

Rel. Humidity: 20 bis 85% | Ambient Temp.: -10 bis +50 °C | Net Weight Motor max. 0.75 kg


Gearmotor Data (at 50 Hz)

Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
Speed (min ⁻¹)	500	417	300	250	200	166	150	120	100	83	75	60	50	41	37	30	25	20	16	15	12.5	10	8.3	7.5
Rated Torque (Nm)	0.12	0.14	0.19	0.23	0.29	0.35	0.39	0.49	0.58	0.70	0.75	0.88	1.10	1.30	1.39	1.60	1.90	2.40	2.90	3.00	3.00	3.00	3.00	3.00


Radial Load (FR) from reduction 25: 1 (10 mm from face mounting): 120 N | Axial Load (FA): 30 N

Net Weight Gearbox max. 0.4 kg

Gearmotor

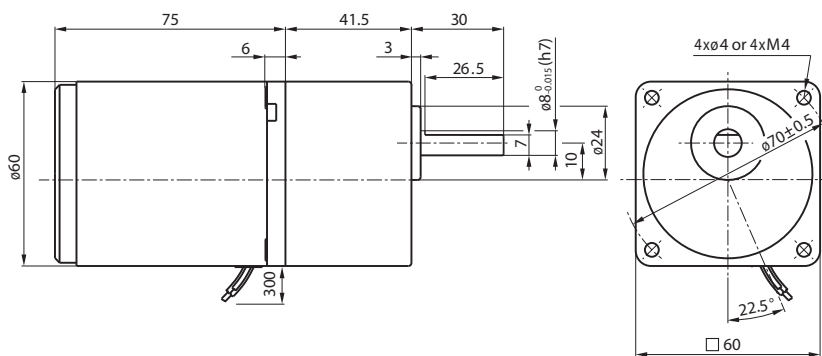


Motor

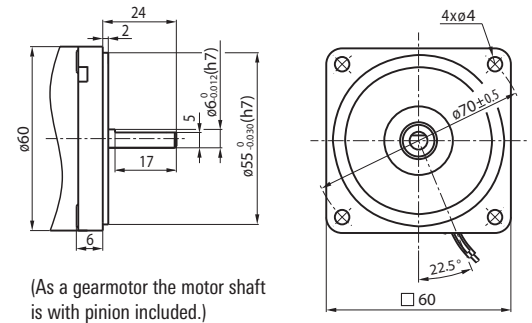

Capacitor



Capacitance (μF)	L	W	H
0.8	36	10.5	20
2.0	36	15.0	25
3.5	38	19.5	31

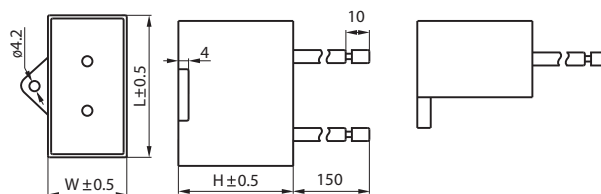

Options

Terminal Box
Worm Gearbox
Bevel Gearbox
Brake

Wiring Diagram: 2IK6-A, 2IK6-E, 2IK6-C, 2IK6-H

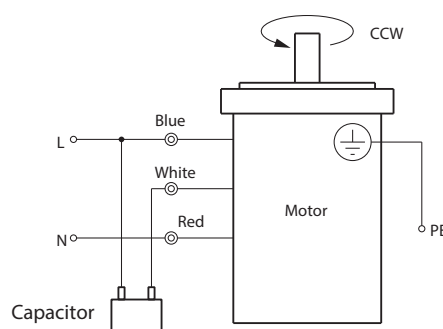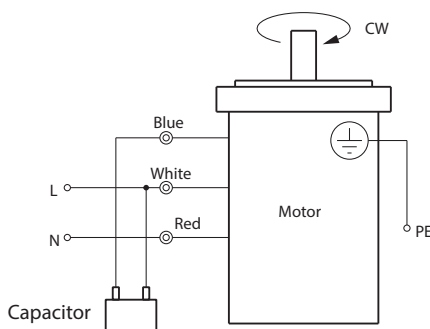

2IK6-S

