


DC Motor Spur Gearbox Type SF64.92-DC36.58


PowerTronic

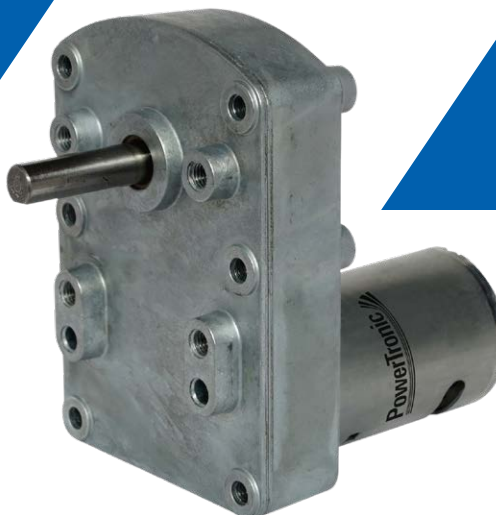

Gearmotor

Gear Ratio	11.8	14.1	17	18.8	21.3	25.2	28.3	31.5	42.5	63	85	126	425	584
Rated Torque (Ncm)	20	24	28	31	36	41	47	52	70	100	140	210	700	920
Rated Speed (min ⁻¹)	310	258	215	191	172	143	129	114	86	57	43	29	8.6	6.7

Rel. Humidity: 20 to 85% | Ambient Temp.: -20 to +80 °C | Net Weight max. 0.6 kg

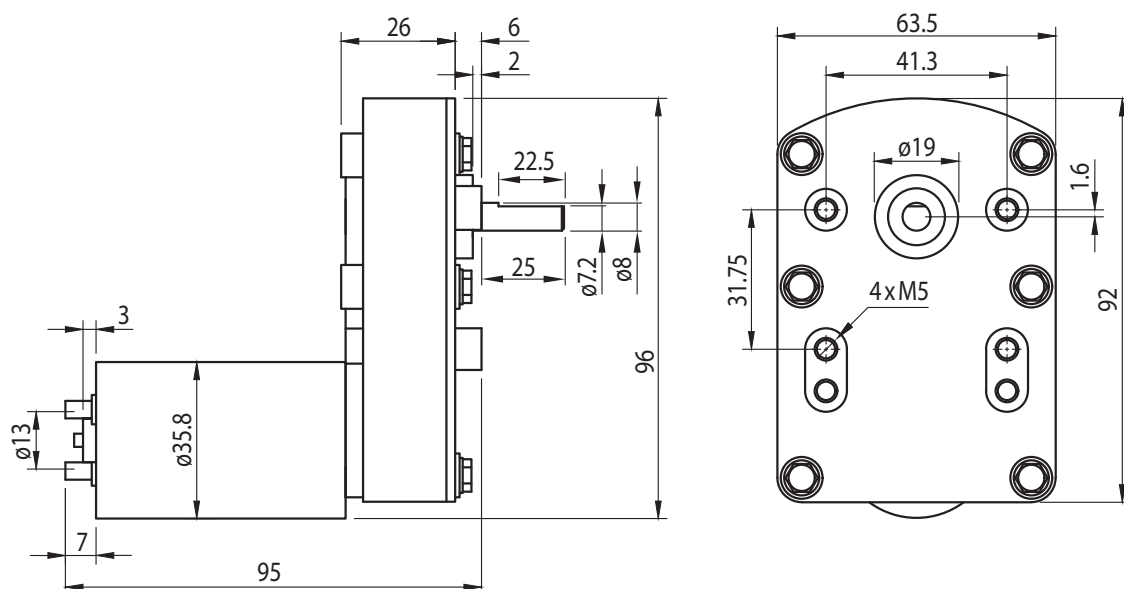

Motor

Rated Voltage (V)	No Load Speed (min ⁻¹)	No Load Current (A)	Rated Speed (min ⁻¹)	Rated Current (A)	Rated Torque (Ncm)	Rated Power (W)
24	4250	0.09	3600	0.44	2.0	7.5

(Also available as standard: 12 V)

Radial Load (FR): 150 N (10 mm from face mounting)
Axial Load (FA): 75 N

Options

Encoder
Rear Shaft
EMC Filter
Leads
Connector
Special Shaft
Special Voltage