

2 Phase Stepper Motor Linear Actuator Type LASH28

PowerTronic



- High Precision
- Long Life
- Low Noise
- High Efficiency

Technical Data




Model	Rated Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Lead Wire (No.)	Holding Torque (Ncm)	Length L (mm)	Step Angle ($^\circ$)
LASH28.33-3402	0.35	15	9.2	4	6	33	1.8
LASH28.41-4401	0.67	7.0	6.0	4	8	41	1.8
LASH28.50-5401	0.67	9.0	7.2	4	10	50	1.8

Rel. Humidity: 20 to 85% | Ambient Temp.: -20 to +50 °C

Screw

Code	Diameter $\varnothing D$	Linear Travel per Step	Step
471-0.63	4.77	0.003	0.6035
472-2.54		0.0127	2.54
474-5.08		0.0254	5.08

Connections

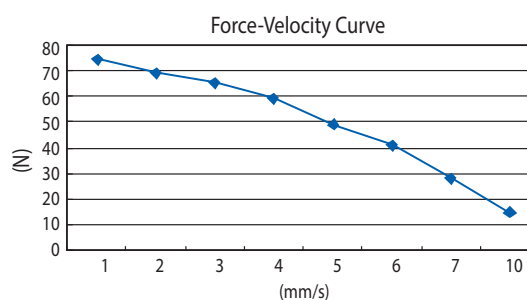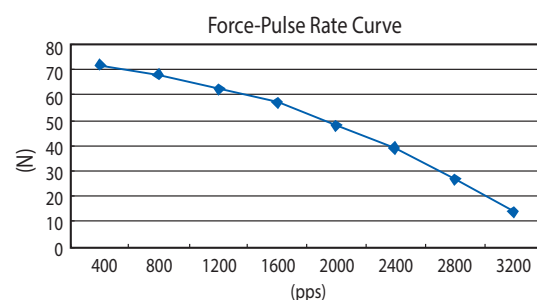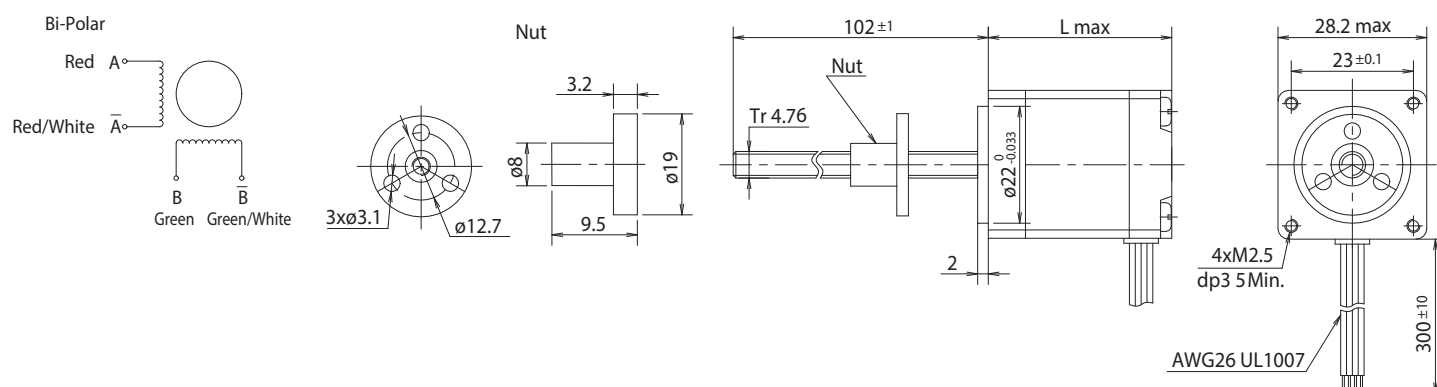

Options

- Various Step Sizes
- 3 and 5 Phases
- Customised Shaft
- Customised Cable & Connector