


2 Phase Stepper Motor Linear Actuator Type LASH35

PowerTronic

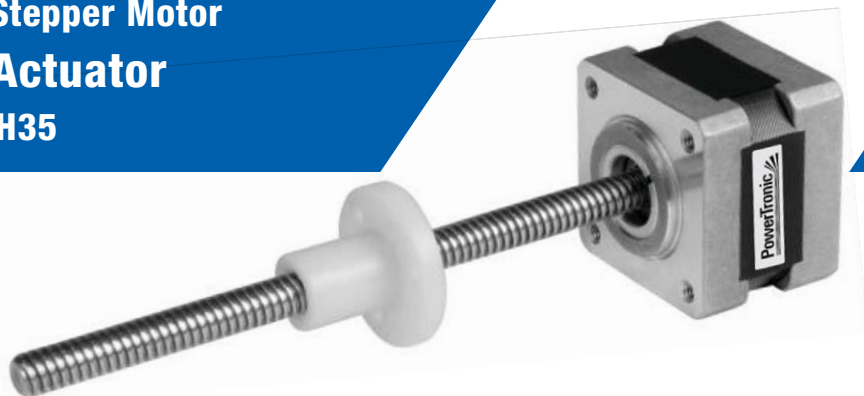

- High Precision
- Long Life
- Low Noise
- High Efficiency

Technical Data

Model	Rated Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Lead Wire (No.)	Holding Torque (Ncm)	Length L (mm)	Step Angle ($^\circ$)
LASH35.34-3402	0.8	7.5	11	4	22	34	1.8
LASH35.34-3415	1.5	2.2	2.5	4	22	34	1.8
LASH35.44-6415	1.5	3.2	3.5	4	28	44	1.8




Rel. Humidity: 20 to 85% | Ambient Temp.: -20 to +50 °C

Screw

Code	Diameter $\varnothing D$	Linear Travel per Step	Step
631-1.27	6.35	0.00635	1.27
631-1.59		0.0079	1.5875
632-2.43		0.01219	2.4384
632-2.54		0.0127	2.54
634-4.87		0.02438	4.8768

Code	Diameter $\varnothing D$	Linear Travel per Step	Step
634-5.08	6.35	0.0254	5.08
634-6.35		0.03175	6.35
638-12.7		0.0635	12.7
638-25.4		0.127	25.4

Connections

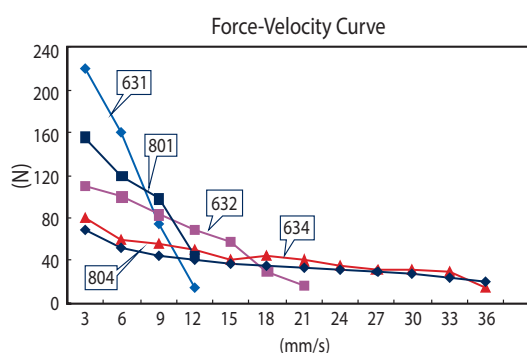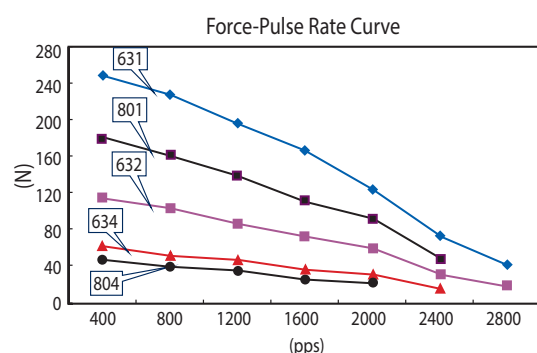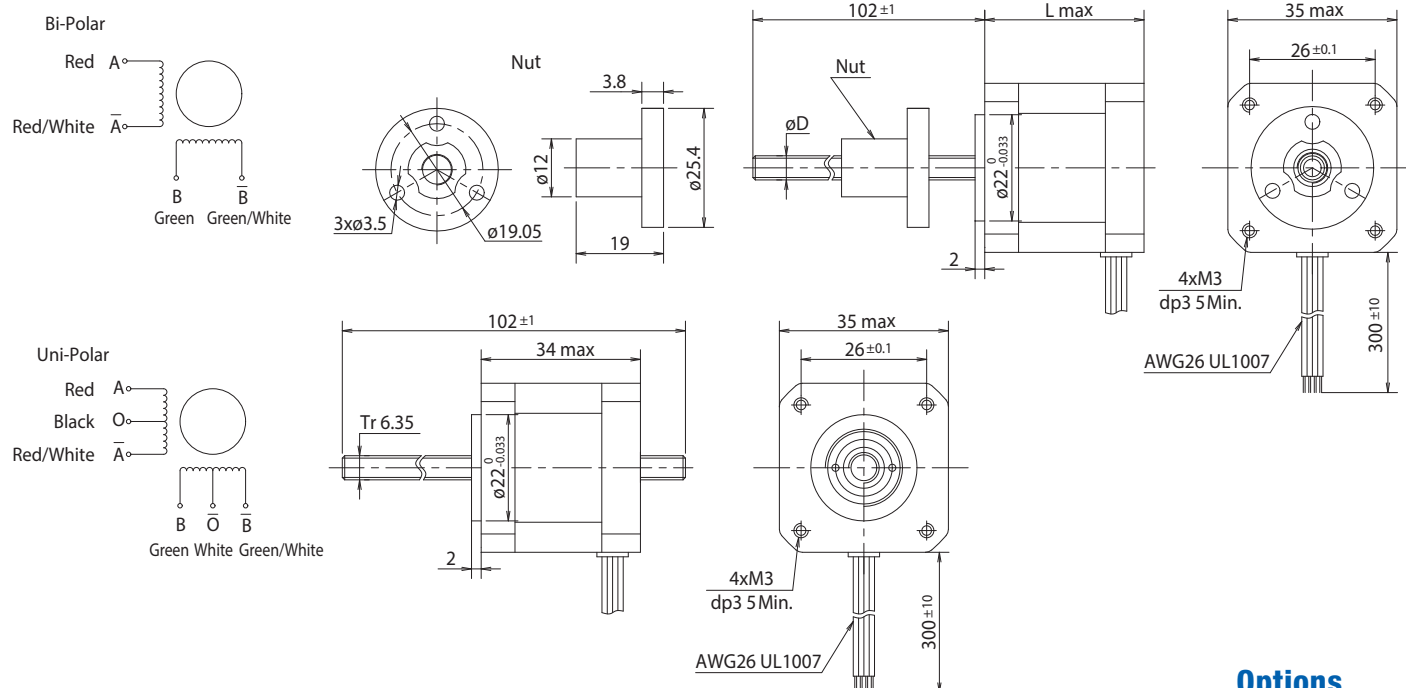

Options

- Various Step Sizes
- 3 and 5 Phases
- Customised Shaft
- Customised Cable & Connector