


2 Phase Stepper Motor Linear Actuator Type LASH60

PowerTronic

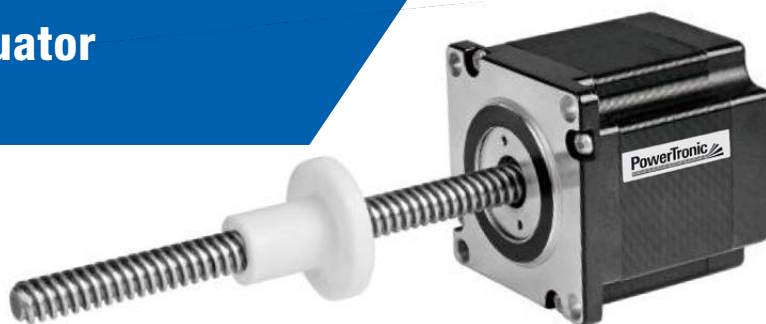

- High Precision
- Long Life
- Low Noise
- High Efficiency

Technical Data








Model	Rated Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Lead Wire (No.)	Holding Torque (Ncm)	Length L (mm)	Step Angle ($^\circ$)
LASH60.56-6428	2.8	0.85	2.8	4	150	56	1.8
LASH60.76-8415	1.5	6.0	16	4	220	76	1.8
LASH60.76-8404	4.2	0.6	1.8	4	220	76	1.8

Rel. Humidity: 20 to 85% | Ambient Temp.: -20 to +50 °C

Screw

Code	Diameter $\varnothing D$	Linear Travel per Step	Step
951-1.27	9.525	0.00635	1.27
954-5.08		0.0254	5.08
954-12.7		0.0635	12.7
958-10.16		0.0508	10.16

Connections

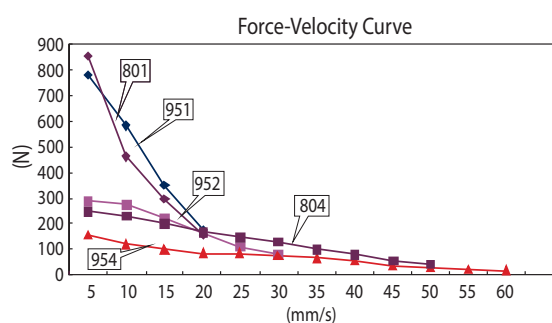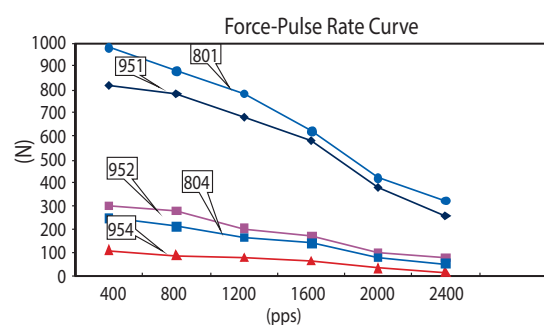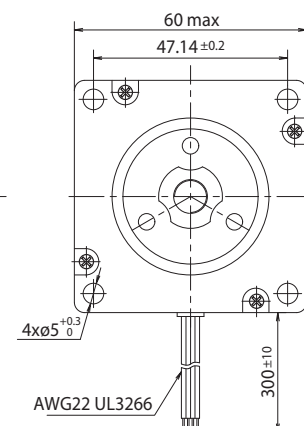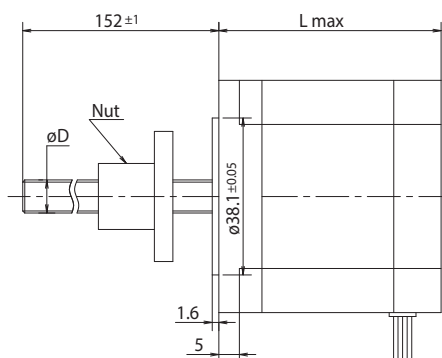

Options

- Various Step Sizes
- 3 and 5 Phases
- Customised Shaft
- Customised Cable & Connector