






DC-Motor Typ DC16.27



Technische Daten

| Modell | Nennspannung (V) | Leerlaufdrehzahl (min ⁻¹) | Leerlaufstrom (A) | Nennzahl (min ⁻¹) | Nennstrom (A) | Nennmoment (Ncm) | Nennleistung (W) | Wirkungsgrad (%) | Blockierstrom (A) | Blockiermoment (Ncm) |
|--------|------------------|---------------------------------------|-------------------|-------------------------------|---------------|------------------|------------------|------------------|-------------------|----------------------|
| 13130 | 2.0 | 3700 | 0.038 | 3000 | 0.11 | 0.03 | 0.1 | 42 | 0.45 | 0.17 |
| 11170 | 7.0 | 10300 | 0.046 | 8500 | 0.17 | 0.07 | 0.6 | 51 | 0.80 | 0.46 |
| 09250 | 8.0 | 7900 | 0.027 | 6300 | 0.11 | 0.07 | 0.5 | 51 | 0.42 | 0.35 |
| 06340 | 12.0 | 8000 | 0.028 | 5544 | 0.08 | 0.07 | 0.4 | 42 | 0.42 | 0.26 |

Umgebungstemp.: -10 bis +60 °C | Nettogewicht max. 18g

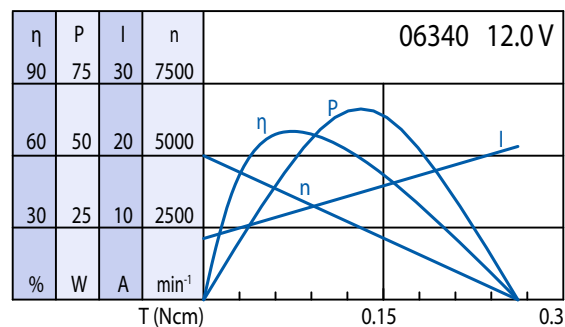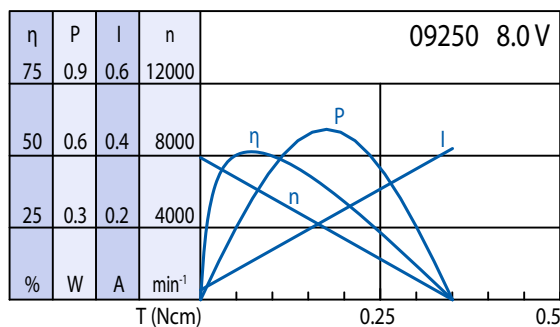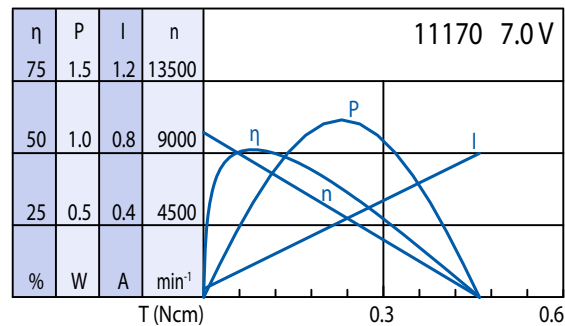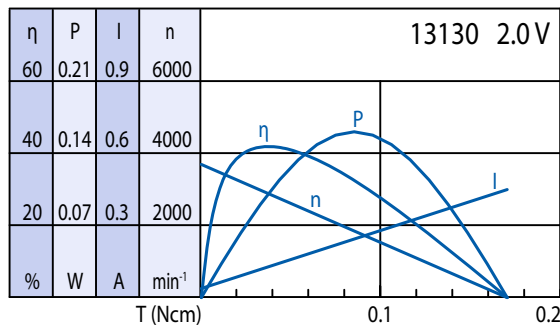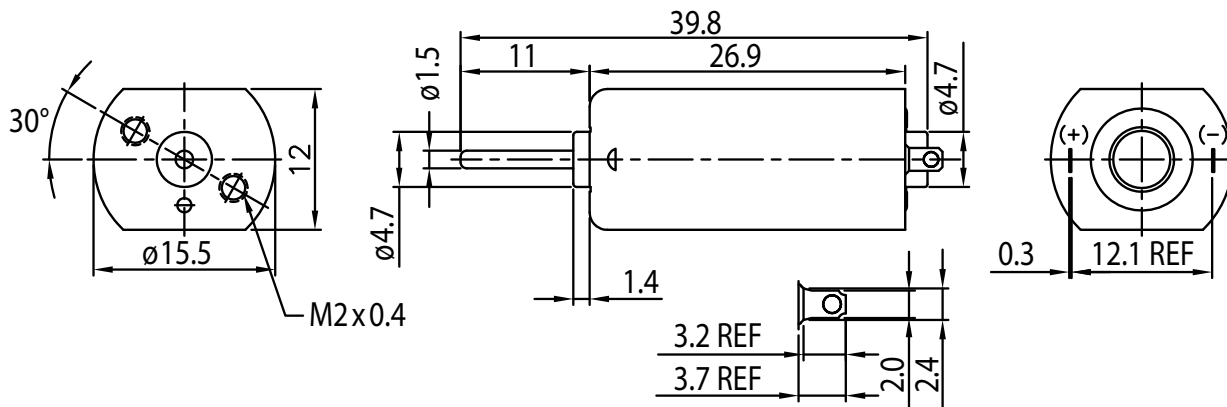

Optionen

| |
|-------------------|
| Entstörungsfilter |
| Litzen |
| Anschlussstecker |
| Sonderwelle |
| Sonderspannung |
| Kugellager |
| Encoder |