






DC-Motor Typ DC52.69



Technische Daten

| Modell | Nennspannung (V) | Leerlaufdrehzahl (min ⁻¹) | Leerlaufstrom (A) | Nenndrehzahl (min ⁻¹) | Nennstrom (A) | Nennmoment (Ncm) | Nennleistung (W) | Wirkungsgrad (%) | Blockierstrom (A) | Blockiermoment (Ncm) |
|--------|------------------|---------------------------------------|-------------------|-----------------------------------|---------------|------------------|------------------|------------------|-------------------|----------------------|
| 8010F | 12.0 | 13100 | 2.3 | 11100 | 11.9 | 8.8 | 102 | 72 | 83 | 67.7 |
| 8012F | 12.0 | 10800 | 2.0 | 9000 | 13.1 | 11.3 | 107 | 68 | 80 | 78.7 |
| 5524F | 24.0 | 11000 | 0.95 | 9700 | 6.3 | 11.0 | 112 | 74 | 45 | 85.8 |
| 5025F | 12.0 | 5050 | 1.2 | 4000 | 4.8 | 8.4 | 35 | 63 | 20 | 41.8 |

Umgebungstemp.: -10 bis +60 °C | Nettogewicht max. 480g

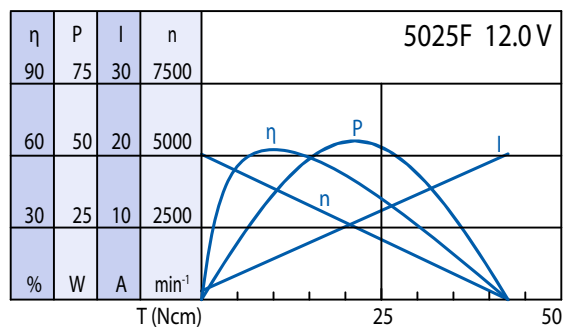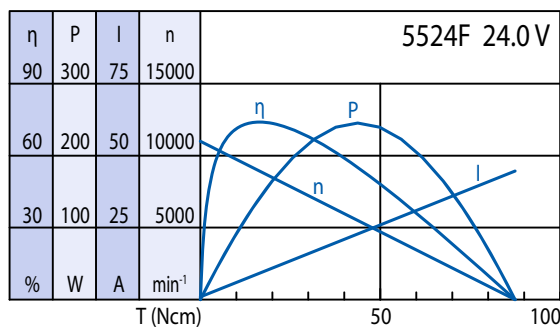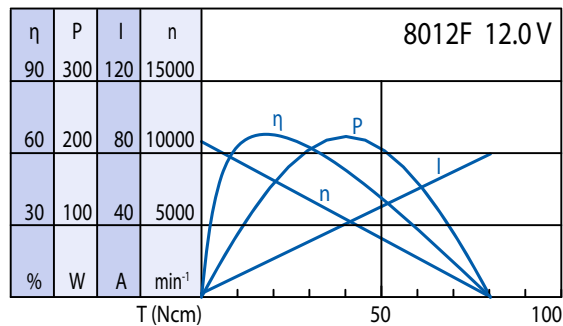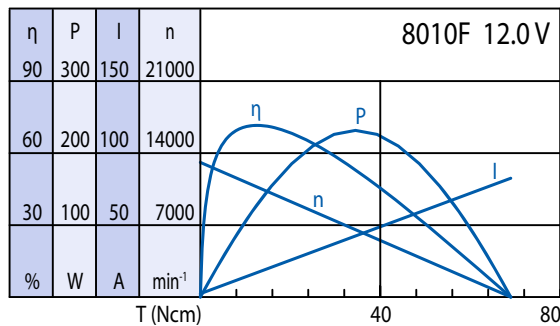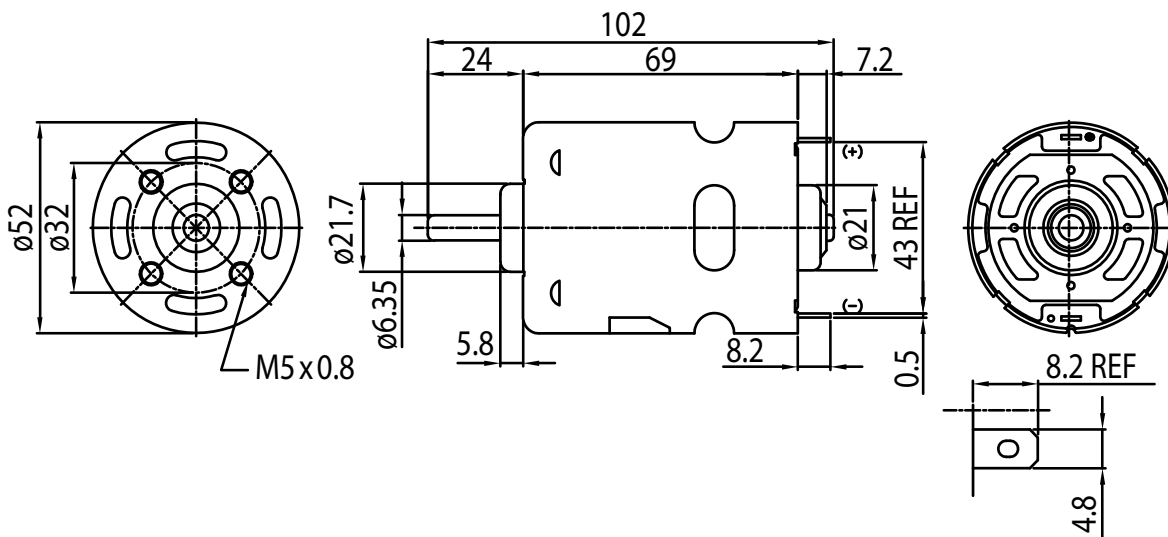

Optionen

| |
|-------------------|
| Entstörungsfilter |
| Litzen |
| Anschlusstecker |
| Sonderwelle |
| Sonderspannung |
| Kugellager |
| Encoder |